



CIT Series

Harsh Environment Enclosures

FEATURES & SPECIFICATIONS

INTENDED USE

CITADEL 2™ offers more versatility than any other weatherproof enclosure offered in North America. Poured in place gasket and cam latches seal the enclosures. The Mounting System can provide dramatic savings on the installation labor. Designed around T8 and T5 lamps for long term energy savings. Very tough diffusers resist breakage.

SIZE W x L x H in inches (mm)

4.50W x 4.12H (115 x 105)

7.30W x 4.12H (185 x 105)

LAMP

1, 2, or 3 Lamp Positions in Cross section.

MATERIALS & FEATURES

One-piece compression-molded polyester fiberglass housing with polycarbonate latches. Seamless continuously bonded poured-in-place polyurethane gasketing. Ballast/component tray attaches fixture body with pinch-release clips. 1/2" conduit entry hole in each end of housing with weathertight plug.

- Stainless steel latch with "keeper" (optional).
- Latches can be tamper proof with #6 screw.

DIFFUSER

High reflectance component tray reflector. 100% Impact modified UV stabilized acrylic linear ribbed lens with smooth exterior face for easy cleaning.



MOUNTING

Durable stainless steel mounting hardware. No holes ever have to be drilled through the housing for installation. Installation time is dramatically reduced. Optional stainless steel bail for chain hung installations.

LISTING / CERTIFICATIONS

Fixture & Ballast: UL Listed, Wet Area

Ballast: Thermally protected, class P, HPF, Non PCB

NSF: Splash Zone certified

IP67: Certified (immersion at 1m for 30 min.

CUL

High Pressure Hose Down

IP 65

IP 66

Nema 4, 4X

Non-Metallic

UL1598 Damp Locations

UL1598 Wet Locations

ORDERING INFORMATION

Example: CITLB232E120

CIT	LB	2 32		E120
Series CIT Enclosed Wet Location Spec Grade		Lamp Count 1, 2, or 3 1724 in. T8, 2 ft. nom. length 1, 2, or 3 1422 in. T5, 2 ft. nom. length 1, 2, or 3 2422 in. T5HO, 2 ft. nom. length 1, 2, or 3 3248 in. T8, 4 ft. nom. length 1, 2, or 3 2846 in. T5, 4 ft. nom. length 1, 2, or 3 5446 in. T5HO, 4 ft. nom. length 2 or 3 32 848 in. T8, 8 ft. nom. length (tandem) 2 or 3 28 846 in. T5, 8 ft. nom. length (tandem) 2 or 3 54 846 in. T5HO, 8 ft. nom. length (tandem)		Ballast & Voltage [1] E120Electronic, 120V E277Electronic, 277V MVElectronic, Multivolt (120-277) H120Electronic, 120V Hi-Lume [3] H277Electronic, 277V Hi-Lume [3] HMVElectronic, MV Hi-Lume [3] L120Electronic, 120V Lo-Lume [3] L277Electronic, 277V Lo-Lume [3] LMVElectronic, MV Lo-Lume [3] HiLume and LoLume ballasts available for T8 lamps only
		Lens LBLinear Ribbed Acrylic PCPolycarbonate	Options [1] CITMBILMounting bracket for 1 light CITMB2LMounting bracket for 2 or 3 light. (2 per fixture) TLTamper Resistant Latching Systems SLStainless steel latch TSLTamper Resistant Stainless latch	

* For 1 Light matching 2 light wider body add "WD"

CIT Series


Harsh Enviroment Enclosures




DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

One Lamp




Two or Three Lamp

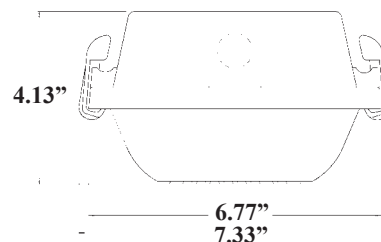


CITMB Accessory



Basic Reflector:
M23

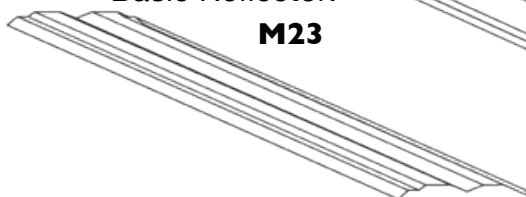

Wide Distribution Reflector:
M45

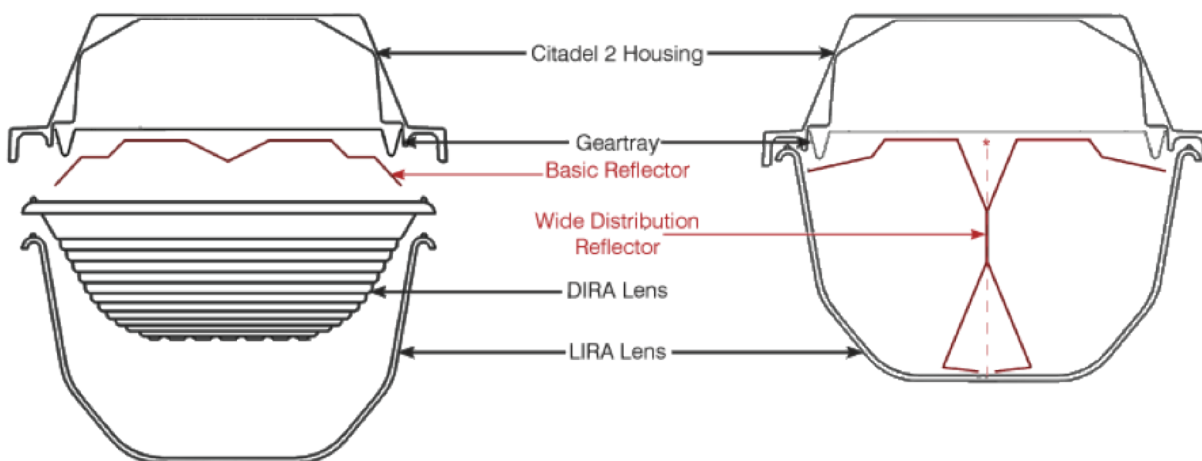

Optically Clear Lens (OL) with
Basic Reflector:

M23



Optically Clear Lens (OL) with
Wide Distribution Reflector:

M45



Catalog Number:

Notes:

CIT Series

Harsh Enviroment Enclosures



PHOTOMETRICS


Calculated using the zonal cavity method in accordance with IESNA LM41 procedure. Lamp configurations shown are typical. Photometric data on these and other configurations available upon request.

Candela Distribution

	0.0	22.5	45.0	67.5	90.0
0	1818	1818	1818	1818	1818
5	1811	1822	1850	1852	1861
15	1745	1812	1839	1843	1848
25	1625	1711	1743	1766	1768
35	1448	1531	1585	1651	1673
45	1211	1287	1402	1507	1538
55	911	1015	1182	1386	1441
65	569	698	946	1055	1090
75	226	423	628	823	877
85	29	192	412	579	625
90	12	109	293	443	502
95	11	55	214	335	395
105	6	9	79	128	144
115	0	0	22	56	68
125	0	0	2	15	25
135	0	0	0	1	6
145	0	0	0	0	0
155	0	0	0	0	0
165	0	0	0	0	0
175	0	0	0	0	0

Floor	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%
Ceiling	80%	80%	80%	80%	70%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	10%	0%
Wall	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
RCR Zonal cavity coefficients CIT254 Spacing ratio. Along 1.2 Across 1.9																		
0	81	81	81	81	79	79	79	79	75	75	75	71	71	71	67	67	67	66
1	73	69	65	62	70	67	64	61	63	61	58	60	58	56	57	55	53	52
2	65	59	54	49	63	57	53	48	54	50	47	51	48	45	49	46	44	42
3	59	51	45	40	57	50	44	40	47	42	38	45	41	37	43	39	36	34
4	54	45	39	34	52	44	38	33	42	36	32	40	35	32	38	34	31	29
5	50	40	34	29	48	39	33	28	37	32	28	35	31	27	34	30	26	25
6	46	36	29	25	44	35	29	25	33	28	24	32	27	24	31	26	23	21
7	42	32	26	22	41	32	26	22	30	25	21	29	24	21	28	24	20	19
8	39	30	23	19	38	29	23	19	28	22	19	27	22	18	25	21	18	17
9	37	27	21	17	35	26	21	17	25	20	17	24	20	17	23	19	16	15
10	34	25	19	16	33	24	19	15	23	19	15	23	18	15	22	18	15	13

Photometric Distribution Curve



Luminance Data (CD/SQ. M)

	0-DEG	45-DEG	90-DEG
45	7605	7508	7885
55	6955	7259	8355
65	5762	7060	7535
75	3558	6213	7799
85	1100	6329	8136

Catalog Number:

Notes:

Texas Fluorescents
 2055 Luna Rd. Suite 142 Carrollton, TX 75006
 Phone: 972-247-3171 Fax: 972-247-0200
www.texasfluorescents.com email: sales@texasfluorescents.com